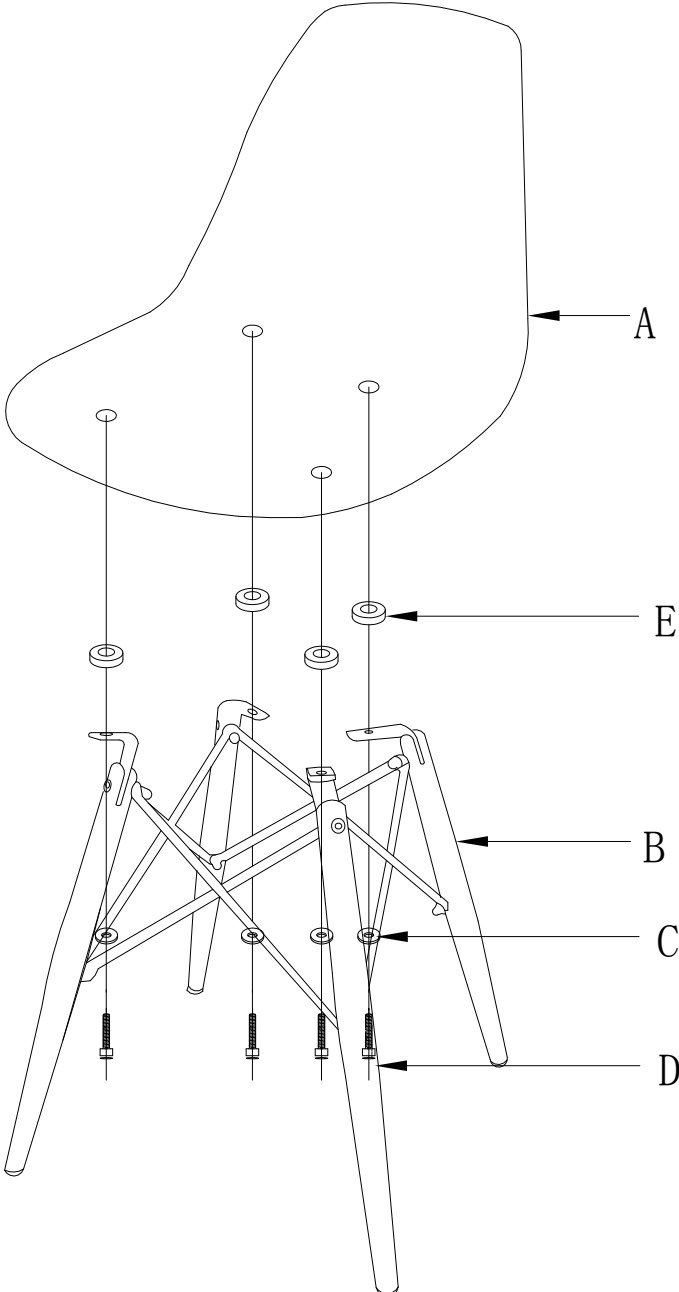








# DSW Chair in ABS Assembly Instructions

 <p>The main assembly diagram shows the chair seat (A) being attached to the frame (B). The seat is positioned above the frame, and four vertical lines indicate the attachment points. Washers (C) are placed between the seat and the frame. Bolts (D) are inserted through the seat and frame, and spacers (E) are placed between the washers. A hex key (F) is used to tighten the bolts.</p>	<p>A</p>  <p>1PC</p>	<p>B</p>  <p>1PC</p>	<p>C</p>  <p>4PCS</p>	<p>D</p>  <p>4PCS</p>	<p>E</p>  <p>4PCS</p>	<p>F</p>  <p>1PC</p>
---	---	--	--	--	--	---